

**PRODUCT DESCRIPTION**

Soundfoam GF is a family of graphitized and fireproof polyurethane foams developed to meet the fire requirements of the aviation industry.

Soundfoam GF50120 is pink in color and has a net density of 43 – 49 kg/m³.

MARKETS**TYPICAL APPLICATIONS**

- Launch vehicles, satellites, engine power systems, planes, and helicopters

PHYSICAL PROPERTIES & PERFORMANCE

	Unit	Method	Value
Net Density	kg/m ³	NF EN ISO 845	43 – 49
ILD 40%	N	NF EN ISO 2439 B	100 – 150
Vertical burner test	–	FAR25.853 (a) Amdt. 25-83 App.F-Part I (a1) (ii) vertical burner test	Pass
Elongation at Break	%	ISO 1798	112
Tensile Strength	kPa	ISP 1798	86
Compression Set (50% at 70°C)	%	NF EN ISO 1856	15
Dynamic Fatigue	%	NF EN ISO 3385 <i>Harness loss at 40%</i> <i>Thickness loss at 40%</i>	25 4
Static Fatigue	%	NFT 56-116 <i>Harness loss at 40%</i> <i>Thickness loss at 40%</i>	25 4
Kerosen Burner Test	–	FAR25.853 (c) Amdt.25-83 App.F-Part II – Kerosen burner test	Pass(*)

**PRODUCT DESCRIPTION**

Soundfoam GF is a family of graphitized and fireproof polyurethane foams developed to meet the fire requirements of the aviation industry.

Soundfoam GF55170 is grey in color and has a net density of 50 - 55 kg/m³.

MARKETS**TYPICAL APPLICATIONS**

- Launch vehicles, satellites, engine power systems, planes, and helicopters

PHYSICAL PROPERTIES & PERFORMANCE

	Unit	Method	Value
Net Density	kg/m ³	NF EN ISO 845	50 - 55
ILD 40%	N	NF EN ISO 2439 B	150 - 190
Vertical burner test	-	FAR25.853 (a) Amdt. 25-83 App.F-Part I (a1) (ii) vertical burner test	Pass
Elongation at Break	%	ISO 1798	99
Tensile Strength	kPa	ISP 1798	91
Compression Set (50% at 70°C)	%	NF EN ISO 1856	8
Dynamic Fatigue	%	NF EN ISO 3385 <i>Harness loss at 40%</i> <i>Thickness loss at 40%</i>	25 4
Static Fatigue	%	NFT 56-116 <i>Harness loss at 40%</i> <i>Thickness loss at 40%</i>	25 4
Kerosen Burner Test	-	FAR25.853 (c) Amdt.25-83 App.F-Part II - Kerosen burner test	Pass(*)

**PRODUCT DESCRIPTION**

Soundfoam GF is a family of graphitized and fireproof polyurethane foams developed to meet the fire requirements of the aviation industry.

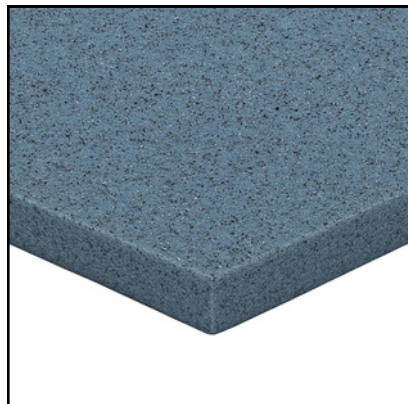
Soundfoam GF65250 is yellow in color and has a net density of 60 – 65 kg/m³.

MARKETS**TYPICAL APPLICATIONS**

- Launch vehicles, satellites, engine power systems, planes, and helicopters

PHYSICAL PROPERTIES & PERFORMANCE

	Unit	Method	Value
Net Density	kg/m ³	NF EN ISO 845	60 – 65
ILD 40%	N	NF EN ISO 2439 B	225 – 275
Vertical burner test	–	FAR25.853 (a) Amdt. 25-83 App.F-Part I (a1) (ii) vertical burner test	Pass
Elongation at Break	%	ISO 1798	85
Tensile Strength	kPa	ISP 1798	126
Compression Set (50% at 70°C)	%	NF EN ISO 1856	7
Dynamic Fatigue	%	NF EN ISO 3385 <i>Harness loss at 40%</i> <i>Thickness loss at 40%</i>	25 4
Static Fatigue	%	NFT 56-116 <i>Harness loss at 40%</i> <i>Thickness loss at 40%</i>	25 4
Kerosen Burner Test	–	FAR25.853 (c) Amdt.25-83 App.F-Part II – Kerosen burner test	Pass(*)

**PRODUCT DESCRIPTION**

Soundfoam GF is a family of graphitized and fireproof polyurethane foams developed to meet the fire requirements of the aviation industry.

Soundfoam GF90400 is blue in color and has a net density of 76 – 94 kg/m³.

MARKETS**TYPICAL APPLICATIONS**

- Launch vehicles, satellites, engine power systems, planes, and helicopters

PHYSICAL PROPERTIES & PERFORMANCE

	Unit	Method	Value
Net Density	kg/m ³	NF EN ISO 845	76 – 94
ILD 40%	N	NF EN ISO 2439 B	350 – 500
Vertical burner test	–	FAR25.853 (a) Amdt. 25-83 App.F-Part I (a1) (ii) vertical burner test	Pass
Elongation at Break	%	ISO 1798	67
Tensile Strength	kPa	ISP 1798	136
Compression Set (50% at 70°C)	%	NF EN ISO 1856	6
Dynamic Fatigue	%	NF EN ISO 3385 <i>Harness loss at 40%</i> <i>Thickness loss at 40%</i>	25 4
Static Fatigue	%	NFT 56-116 <i>Harness loss at 40%</i> <i>Thickness loss at 40%</i>	25 4
Kerosen Burner Test	–	FAR25.853 (c) Amdt.25-83 App.F-Part II – Kerosen burner test	Pass(*)

**PRODUCT CONFIGURATIONS**

- Available in custom die-cut parts, 60" wide sheets or rolls, and kits.
- Minimum order quantities may apply
- Lead times variable

(*) In combination with different textile covers and/or fire-blocking textiles.

THE SOUNDCOAT PROMISE

We have one goal: to enhance the customer experience by providing world-class products manufactured under ISO 9001:2015 and AS9100:2016 standards in one of our modern manufacturing facilities strategically located on each coast.

All materials are tested and qualified in our acoustics and materials testing laboratory to ensure consistent quality and performance.

Soundcoat products are supplied, tested, and produced to your specifications.

Rev. date 9/9/2025

Visit [soundcoat.com](https://www.soundcoat.com) to see our complete line of absorption, barrier, damping, sealing, and thermal materials.

For further information on meeting specific requirements and for optimum product configuration, contact our Technical Support Department at 1-800-394-8913.

The information contained herein is based on laboratory test data developed by or for Soundcoat and is believed to be reliable, but its accuracy or completeness is not guaranteed. The buyer must test this product to determine its suitability for his/her specific application before use. Only use a Soundcoat product after thoroughly consulting instructions on the data sheet for the specific product. SOUNDCOAT DISCLAIMS ANY RESPONSIBILITY FOR 1) WARRANTIES OF FITNESS AND PURPOSE, 2) VERBAL RECOMMENDATIONS, 3) CONSEQUENTIAL DAMAGES FROM USE, AND 4) VIOLATION OF ANY PATENTS OR TRADEMARKS HELD BY OTHERS.

Properties subject to change without notice. Check with Soundcoat for latest revisions. Flame, smoke, toxicity performance is not intended to reflect hazards presented by this material under actual fire conditions. The Federal Trade Commission considers that there are no existing test methods or standards regarding flammability that are accurate indicators of the performance of cellular plastic materials under actual fire conditions. Any results of existing test methods are intended for measurements of the relative performance of such materials under specific controlled test conditions.

Kapton®, Nomex® and Tedlar® are registered trade names of Dupont Corporation.