



SOUNDFOAM O with MATTE FILM FACING



Complete composite assembly.

PRODUCT DESCRIPTION

Soundfoam O is an acoustic quality, open cell, flexible polyester based polyurethane foam. The unique urethane foam formulation provides a uniform cell structure that provides consistent acoustical performance, a flammability rating of UL 94 HF-1, with standard physical properties.

The black urethane matte film is applied by a specialized lamination to the top side of the foam. This unique process keeps the face of the foam micro-porous to maintain a quality acoustic absorption rating, while still resisting the ingress of fluids. The surface treatment improves durability, cleanability, and shifts the acoustic absorption curve to the lower frequencies.

Black matte film is applied to sheets, and after the lamination process, parts are cut to shape (if applicable).

MARKETS



TYPICAL APPLICATIONS

- Trucks, buses, construction, mining, agriculture, military transport, and emergency vehicles
- Gensets, conveying systems, HVAC, compressed air
- Semiconductors, telecommunications equipment, EV charging stations and battery storage
- Medical equipment

PRODUCT CONFIGURATIONS

- Custom die-cut parts, sheets, and kits

FOAM PHYSICAL PROPERTIES - SOUNDFOAM O

Material Type	Polyester urethane foam
Color	Charcoal grey
Density	2.0±0.2. lb/ft ³
Operating Temperature	-43°C (-45°F) to 110°C (230°F)
Tensile Strength	20 PSI Min
Elongation	200%
Compression Set	<10%
Thermal Conductivity	0.25 BTU in./h ft ² °F
Flame Resistance	UL Recognized as UL 94 HF1 MVSS-302 FAR 25.853(b)




Soundfoam O



SOUNDFOAM O with MATTE FILM FACING

FACING PHYSICAL PROPERTIES - MATTE FILM

Material Type	Polyurethane
Colors	Black (available in white, grey, bone, & custom colors)
Weight	0.0157 lb/ft ²
Thickness	0.0025" (other thicknesses available)
Operating Temperature	-43°C (-45°F) to 110°C (230°F)
Tensile Strength	9000 PSI
Elongation	375%
Flame Resistance	Application dependent: MVSS-302 on Soundfoam M (and most other foams)

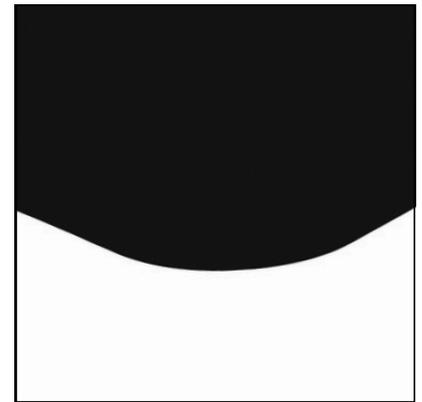

Black Matte Film

THE SOUNDCOAT PROMISE

We have one goal: to enhance the customer experience by providing world-class products manufactured under ISO 9001:2015 and AS9100:2016 standards in one of our modern manufacturing facilities strategically located on each coast.


All materials are tested and qualified in our acoustics and materials testing laboratory to ensure consistent quality and performance.

Soundcoat products are supplied, tested, and produced to your specifications.



SOUNDFOAM O with MATTE FILM FACING

PERFORMANCE

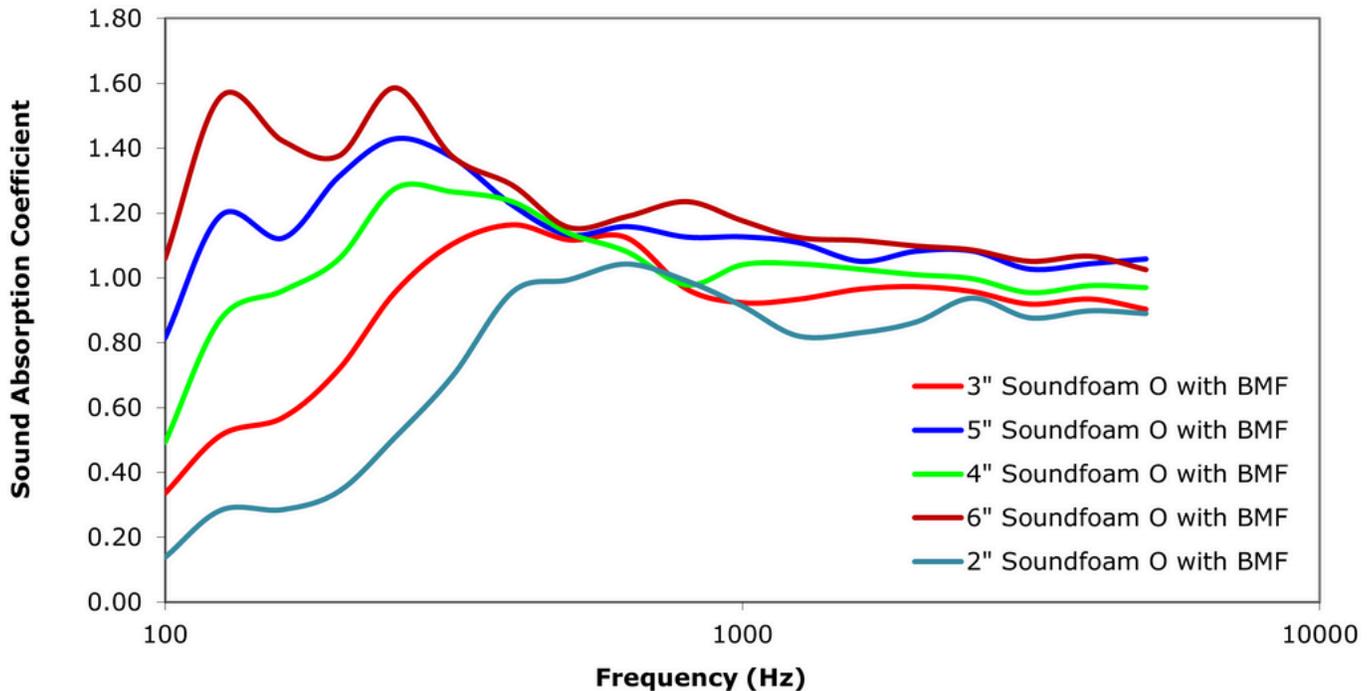

Rev. date 10/30/2025

Visit soundcoat.com to see our complete line of absorption, barrier, damping, sealing, and thermal materials.

For further information on meeting specific requirements and for optimum product configuration, contact our Technical Support Department at 1-800-394-8913.

The information contained herein is based on laboratory test data developed by or for Soundcoat and is believed to be reliable, but its accuracy or completeness is not guaranteed. The buyer must test this product to determine its suitability for his/her specific application before use. Only use a Soundcoat product after thoroughly consulting instructions on the data sheet for the specific product. SOUNDCOAT DISCLAIMS ANY RESPONSIBILITY FOR 1) WARRANTIES OF FITNESS AND PURPOSE, 2) VERBAL RECOMMENDATIONS, 3) CONSEQUENTIAL DAMAGES FROM USE, AND 4) VIOLATION OF ANY PATENTS OR TRADEMARKS HELD BY OTHERS.

Properties subject to change without notice. Check with Soundcoat for latest revisions. Flame, smoke, toxicity performance is not intended to reflect hazards presented by this material under actual fire conditions. The Federal Trade Commission considers that there are no existing test methods or standards regarding flammability that are accurate indicators of the performance of cellular plastic materials under actual fire conditions. Any results of existing test methods are intended for measurements of the relative performance of such materials under specific controlled test conditions.

Kapton®, Nomex®, and Tedlar® are registered trade names of Dupont Corporation.